

# PG6-F ABC

Cartridge operated

Powder

6 kg

Temperature ranges

-30°C + 60°C



On request



## BODY

STEEL

Deep drawn 3-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin. CE marked

## VALVE

ALUMINUM

Lever activated valve with anodized aluminum body, ensuring high protection against corrosion

## HOSE

The reinforced rubber hose with pressure connections guarantees perfect flexibility within the temperature range. Complete with nozzle

## EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

## PROPELLANT

CO2 Cartridge screwed to the valve

## STANDARD PACK

Single piece cardboard box, robust and suitable for transport



**EXTINCTEUR**  
6 kg POUDRE ABC  
34A 233B C

ENLEVER LA GOUPILLE.  
BAISSER LE LEVIER DE COMMANDE.  
VISER LA BASE DES FLAMMES.  
PRESSER LA GACHETTE.

UTILISABLE SUR INSTALLATION ELECTRIQUE  
SOUS TENSION INFERIEURE A 1000V.  
TENIR LE DIFFUSEUR A PLUS DE 1 M.  
EVITER TOUT CONTACT DE LA LANCE AVEC UN  
CONDUCTEUR ELECTRIQUE

Recharger selon usage, selon notice. Contrôler l'extincteur périodiquement et il utiliser pour le développement des incendies qui ne possèdent et pas de danger mortelles au moindre contact.  
Agent Extincteur 6 kg Poudre ABC/ABC Type: PG6-F ABC  
Agent Extincteur: 2333 C/34  
Température limite d'utilisation: -30°C + 60°C  
Conformité NF EN 615

**ANAFGROUP**  
Anaf Fire Protection S.p.A. - 27020 Torre d'Isola (PS) Italy  
www.anaf.eu E-mail: info@anaf.eu

WEIGHT  
Kg

9,76

DIMENSION  
mm

160 Ø x 480

## Accessories

● Standard ○ On request

### BRACKET



● Wall bracket



○ Transport bracket

### HOSE RINGS & PROTECTIVE BASE



○ Protective base 160 mm

### ADDITIONAL FEATURES



○ Bicolor screen printing

### PACKAGING



● Cardboard box havana color




○ 4 colour cardboard box

## TECHNICAL CHARACTERISTICS

FIRE RATINGS	34A 233B C	
CHARGE	6 kg ± 2%	
CYLINDER	Manufacturing process	Expanded shell, top and bottom part (tig/mag welding)
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
HOSE	Reinforced friction rubber hose	With spray nozzle
	Overall length	690 mm
EXTINGUISHING AGENT	ANAF - A32 ABC dry powder	
PROPELLANT	CO <sub>2</sub> (carbone dioxide) - 120gr	
DISCHARGE	Discharge time	~ 22 s
DIMENSIONS	Overall height	480 mm
	Bottle outer diameter	160 mm
WEIGHT	Empty / Charged	3,77 kg / 9,77 kg
PACKING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	175 x 600 x 230 mm
	Weight per carton	10,28 kg
	Pallet	63 cartons
	Pallet size (B x L x H)	800 x 1200 x 1739 mm
	Pallet volume	1,67 m <sup>3</sup>
	Weight per pallet (net/gross)	648 kg / 668 kg

© REPRODUCTION IS FORBIDDEN

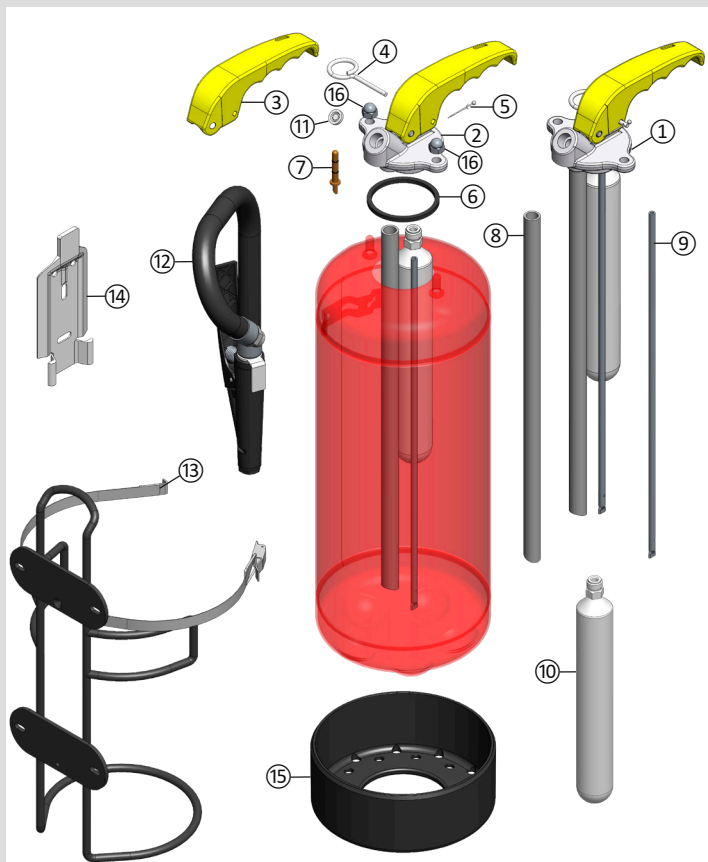

Nr.	Description	Code
1	Valve assembly PG6-F complete with dip tube and CO2 cartridge	00.050E.8500.00
2	Valve assembly PG6-F complete with yellow lever	00.050E.8490.90
3	Yellow lever	00.050E.6000.30
4	Safety pin	00.580E.5020.00
5	Seal	00.245E.5030.00
6	Gasket valve PG-F	00.050E.5000.OR
7	CO2 dip tube PG-M	00.040E.5951.00
8	Shutter PG-F complete with OR	00.050E.5035.00
9	Dip tube PG6-F	00.050E.5900.00
10	CO2 cartridge 120g PG6-F	00.050E.3900.01
11	EPDM Membrane for hose	00.040E.2400.AL
12	Complete hose PG6-M (hose+nozzle)	00.040E.2400.00
13	Truck Bracket PG6-F	00.050E.2900.00
14	Wall bracket	00.005E.2950.00
15	Plastic base Ø 160 complete with hose holder	00.850E.7100.01
16	Blind Nut M8 for French valve	N000.VT.050.00

32.050E.01.02.2021

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)  
 Tel. 0382.4533 Fax. 0382.920279  
 info@anaf.eu | www.anaf.eu